




**MINI SPLIT SYSTEM 38MHRBC/ 40MHHC**

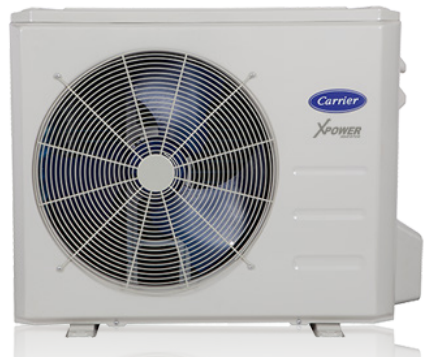

[www.carriercca.com](http://www.carriercca.com)

UP TO 19 SEER



## MINI SPLIT SYSTEM 38MHRBC/ 40MHHC



- ⊕ Turbo
- ⊖ Timer
- 📄 Self-Diagnosis And Auto-Protection
- ✳️ Auto Restart Function
- 🌙 Sleep Mode
- 👤 Follow Me
- 🏠 Louver Position Memory
- 🔄 Self-Cleaning
- 🌟 Golden Anticorrosion Treatment



**WiFi**  
enabled

### Exponential savings


With an efficiency rating of up to 19 SEER, the Carrier Inverter can save you up to 58% in your energy bill. This is possible thanks to its DC inverter technology, which allows to maintain a desired temperature with minimum fluctuations.

### Exponential Product Life

The outdoor unit is built to last with an anti-corrosive treatment, which prolongs the unit's performance and sustains the most severe climates.

### Total Control at your Fingertips

Take control even further. Carrier Inverter has an optional Wi-Fi kit to give you the ability to manage your system's comfort and efficiency from your smartphone. The system can be turned on, off, set the desired temperature, and access other features, all from the convenience of your device. Available for iPhone and Android.

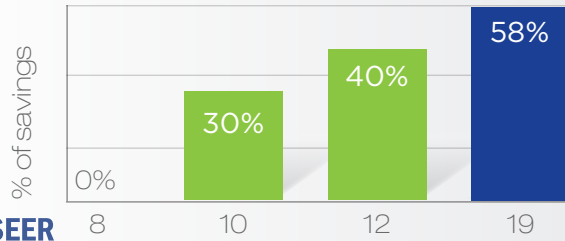

**SEER**  
Carrier Inverter vs an 8 seer traditional system

MODEL		Indoor	40MHHC12---3	40MHHC18---3	40MHHC24---3*	40MHHC12---1
		Outdoor	38MHRBC12AA3	38MHRBC18AA3	38MHRBC24AA3*	38MHRBC12AA1
Power supply		Ph-V-Hz	208-230V~60Hz, 1Ph	208-230V~60Hz, 1Ph	208-230V~60Hz, 1Ph	115V~60Hz, 1Ph
Cooling	Capacity	Btu/h	11500(2900~12700)	17000(4300~17800)	22000(4900~24100)	12000(3000~13000)
	Input	W	1050	1650	1980	1121
	Rated current	A	4.60(1.20~7.30)	7.20(1.80~9.50)	9.00(2.40~11.00)	9.75
	EER	Btu/w	10.95	10.30	11.10	10.70(2.60~15.50)
	SEER	Btu/w	19.0	19.0	18.5	17.3
Minimum Circuit Ampacity		A	11.0	15.0	16.0	15.0
Max.fuse		A	15.0	20.0	25.0	20.0
Indoor air flow(Hi/Mi/Lo)		m3/h	590/460/400	859/717/585	1020/860/710	512/406/324
Indoor noise level (Hi/Mi/Lo)		dB(A)	38.5/32.5/26	41.5/37/32.5	46/42.5/34	39.5/-/28.5
Indoor unit	Dimension(W*D*H)	mm	805x193x302	964x222x325	1106x232x342	805x193x302
	Packing (W*D*H)	mm	875x285x375	1045x305x405	1195x320x420	875x285x375
	Net/Gross weight	Kg	9.1/11.7	11.5/15	15.1/19.0	9.2/11.8
Outdoor air flow		m3/h	2091	2030	3100	2000
Outdoor noise level		dB(A)	52.5	54	58	52
Outdoor unit	Dimension(W*D*H)	mm	770x300x555	770x300x555	845x363x702	770x300x555
	Packing (W*D*H)	mm	900x345x585	900x345x585	965x395x775	900x345x585
	Net/Gross weight	Kg	24.8/27.0	29.9/32.8	40.2/43.5	28.3/30.7
Refrigerant type		g	R410A/530	R410A/900	R410A/1160	R410A/590
Refrigerant piping	Liquid side/ Gas side	mm(inch)	Φ6.35/Φ12.7(1/4"/1/2")	Φ6.35/Φ12.7(1/4"/1/2")	Φ9.52/Φ15.9(3/8"/5/8")	Φ6.35/Φ12.7(1/4"/1/2")
	Max. refrigerant pipe length	m	25	30	30	25
	Max. difference in level	m	10	20	20	10
Thermostat type			Remote Control	Remote Control	Remote Control	Remote Control
Operation temperature	Indoor(cooling/ heating)	°C	17-32/-	17-32/-	17-32/-	17-32/-
	Outdoor(cooling/heating)	°C	-15-50/-	-15-50/-	-15-50/-	-15-50/-



www.carriercca.com

Authorized Dealer: